



SALAD PREP TABLE

DSP60-16-S2 2-Door / Regular Top



Voltage/Frequency
Refrigerant
R290
Type of Defrost
Interial Material
Exterior Material
Temperature Range °F
Compressor Power (HP)
Nema Config.
NEMA5-15P

£95555

PRODUCT FEATURES

- The compressor is mounted in the back and placed in the coolest possible area; this makes it easily accessible for servicing.
- BB Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consump-
- Self-closing doors at 60° with stay open
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- ☐ 6" deep 1/6 plastic plan included.
- High quality coated stainless adjustable shelves prevent peel and rust.
- 🕮 Lifetime warranty on hinges.
- 6" casters with lock for easy mobility.



HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN




Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey **(1-800-931-8628**


info@dukersusa.com

www.DukersUSA.com

DETAILS &SPECIFICATIONS

SALAD PREP TABLE DSP60-16-S2

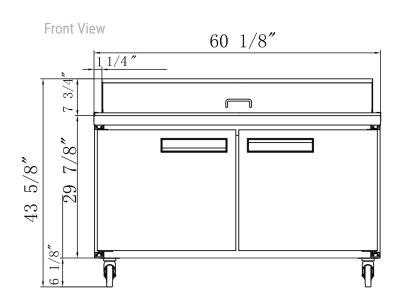



MODEL DSP60-16-S2

Cutting Board Size 60 x 14.5 Rated Voltage 115V Rated Frequency 60Hz **Total Input Power** 280W **Total Current** 2.4A **Total Capacity** 14.33 cu ft 4-5 **Climatic Category Protection Type** Design Pressure High Side **300 PSIG Design Pressure Low Side 150 PSIG Insulation Blowing Gas** C-Pentane Refrigerant R290/3.88 oz

1/6 PAN COUNT: 16

1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6
1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6

MODEL	EXTERNAL DIMEN- SION	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
DSP60-16-S2	60 1/8 x 31 1/2 x	64 3/8 x 35 7/8 x 48 3/8	275 lbs	2	28















Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



info@dukersusa.com

www.DukersUSA.com